


EMI-suppression products

Multi Hole Cores

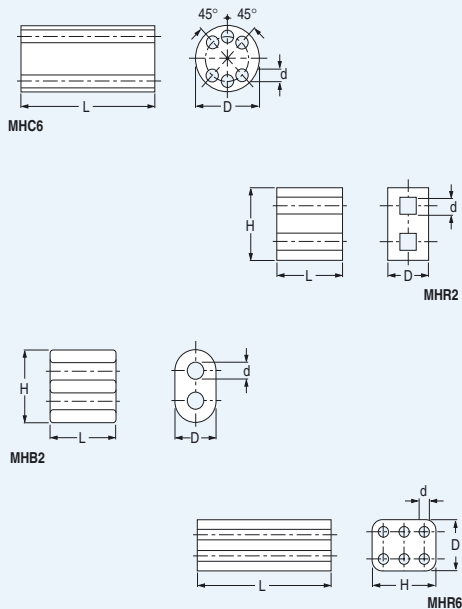

Type Number	dimensions			
	D	L	l	d
MHC6-6/10-3S4	6 ± 0.3	0.7 + 0.2	10 ± 0.5	-
MHC6-6/10-4B1	6 ± 0.3	0.7 + 0.2	10 ± 0.5	-
MHC6-6/5-4B1	6 ± 0.3	0.7 + 0.2	5 - 0.2	-
MHB2-14/8.5/8-4B1	8.5 - 0.5	3.5 + 0.5	8 ± 0.3	14 ± 0.5
MHB2-14/8.5/14-4B1	8.5 - 0.5	3.5 + 0.5	14 ± 0.4	14 ± 0.5
MHB2-13/8/6-4B1 ¹⁾	8.0 ± 0.3	3 ± 0.3	6 ± 0.3	13 ± 0.3
MHB2-13/8/6-3C90 ¹⁾	8.0 ± 0.3	3 ± 0.3	6 ± 0.3	13 ± 0.3
MHR2-11/5.4/11-4A11	5.4 ± 0.3	2.0 ± 0.3	10.9 ± 0.3	10.8 ± 0.3
MHR2-11/5.4/11-3C90	5.4 ± 0.3	2.0 ± 0.3	10.9 ± 0.4	10.8 ± 0.3
MHR6-6.1/4/10-3B1	4 ± 0.2	0.7 + 0.3	10 ± 0.5	6.1 ± 0.3

Multi-hole cores are used for small HF transformers, for voltage or impedance matching in TV, communications, data transmission, instrumentation and similar applications. They are available with 2 and 6 holes (twin cores and six-hole cores), in round and rectangular shapes.

¹⁾ Chamfered holes and sides.

- Summary :
- wide range of shapes
 - several materials
 - for HF matching and suppression