

NRD-515 Rx BOARD BASIC FILTERS, flash Rx from PE1ABR


BLUE = NTK - CLF-D6S | -6 dB = 5.511 kHz | -60 dB = 8.916 kHz | shape 60/6 = 1.618 | loss = 2.7 dB

The narrow AM filter gives the rather bassy sound
for DX an advantage, it is not a HiFi device

RED = -6 dB = 2.152 kHz | -60 dB = 4.429 kHz | shape 60/6 = 2.058 | loss = 6 dB

KOKUSAI - MF-455-10AZ121 - combined with 2 transformers (2:1 and 1:1 !!)

Both in-circuit measurement with filter switch diodes temporary removed.
in-circuit Z = 1K Ohm, Kokusai still without any internal cleaning !

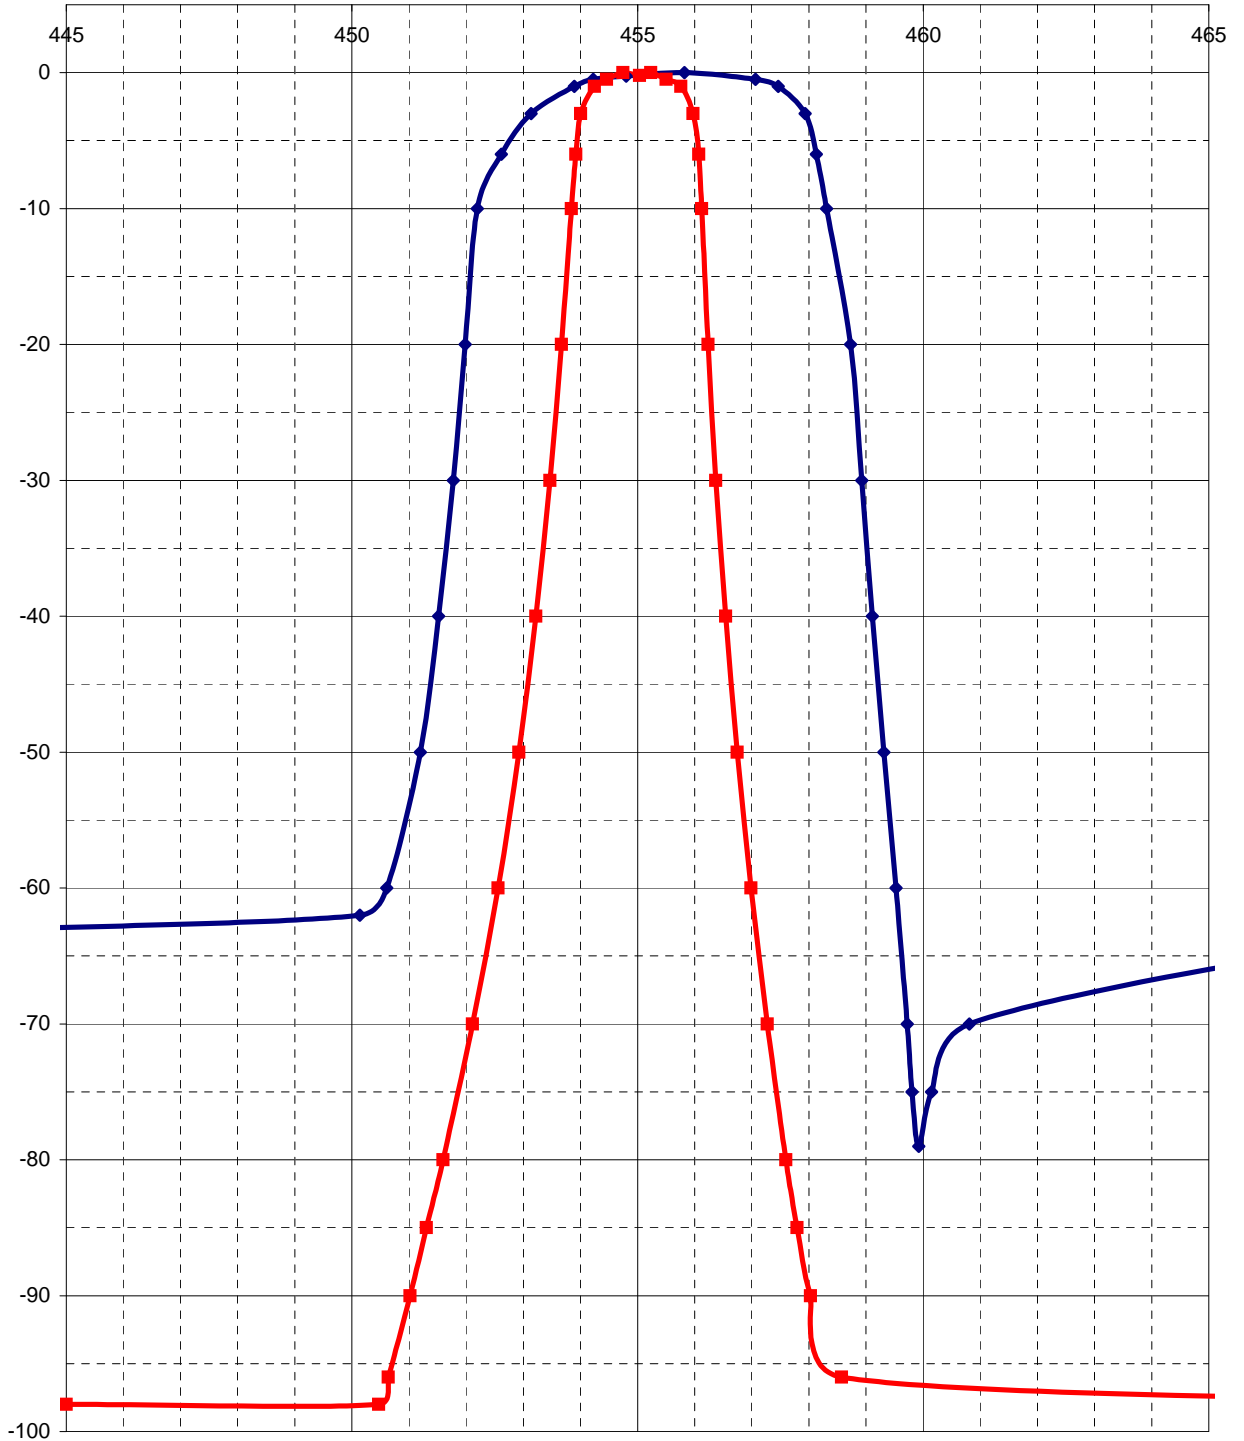

NRD-515 Rx BOARD BASIC FILTERS, flash Rx from PE1ABR

BLUE = NTK - CLF-D6S | -6 dB = 5.511 kHz | -60 dB = 8.916 kHz | shape 60/6 = 1.618 | loss = 2.7 dB

**The narrow AM filter gives the rather bassy sound
for DX an advantage, it is not a HiFi device**

RED = -6 dB = 2.152 kHz | -60 dB = 4.429 kHz | shape 60/6 = 2.058 | loss = 6 dB

KOKUSAI - MF-455-10AZ121 - combined with 2 transformers (2:1 and 1:1 !!)

Both in-circuit measurement with filter switch diodes temporary removed.

in-circuit Z = 1K Ohm, Kokusai still without any internal cleaning !

